
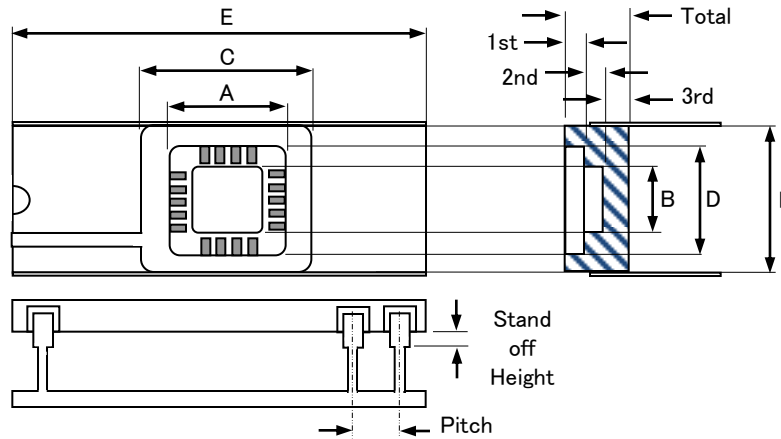


NTK C-DIP (Ceramic - Dual Inline Packages)

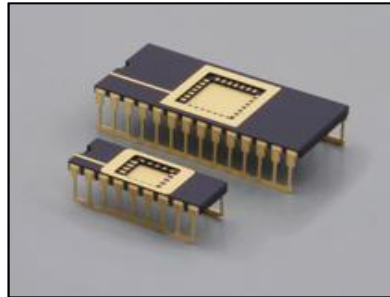

UNIT: inch

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.		TOP CAV.		UP(U) DOWN(D)	1st				2nd	3rd	TOTAL	PITCH	STAND OFF HEIGHT	SEAL RING		DIE ATTACH			
	A	X	B	C			X	D	E							X		F		
8	0.200	x	0.170	0.280	x	0.220	U	0.390	x	0.290	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 6891-MO
8	0.218	x	0.180	0.295	x	0.225	U	0.380	x	0.290	0.040	0.040	0.068	0.148	0.100	0.040	B	0	-	ID - 6656C-MO
8	0.218	x	0.180	0.310	x	0.180	U	0.390	x	0.295	0.052	0.040		0.092	0.100	0.039	B	0	SEE DRAWING	ID - 6538F-MO
8	0.218	x	0.180	0.320	x	0.225	U	0.390	x	0.295	0.025	0.030	0.025	0.080	0.100	0.040	B	0	0	ID - 6074R
8	0.220	x	0.174	0.315	x	0.226	U	0.520	x	0.290	0.020	0.025	0.040	0.085	0.100	0.039	B	0	0	ID - 6177G
8	0.266	x	0.177	0.375	x	0.219	U	0.520	x	0.290	0.025	0.025	0.040	0.090	0.100	0.035	B	0	No.1,5	ID - 6911A-MO
8	0.305	x	0.095	0.400	x	0.200	U	0.520	x	0.288	0.020	0.020	0.040	0.080	0.100	0.035	B	0	No.1,4,5,8	ID - 6393A
10	0.215	x	0.090	0.250	x	0.160	U	0.500	x	0.295	0.020	0.020	0.040	0.080	0.130	0.035	B	No.10	No.10	ID - 7003C
14	0.200	x	0.154	0.315	x	0.221	U	0.748	x	0.295	0.025	0.030	0.030	0.085	0.100	0.035	B	0	0	ID - 6764A-MO
14	0.220	x	0.150	0.315	x	0.221	U	0.748	x	0.295	0.015	0.030	0.035	0.080	0.100	0.035	B	-	-	ID - 6144C
14	0.220	x	0.174	0.315	x	0.225	U	0.748	x	0.295	0.020	0.025	0.035	0.080	0.100	0.035	B	0	0	ID - 268NA
14	0.244	x	0.174	0.340	x	0.225	U	0.800	x	0.297	0.020	0.025	0.040	0.085	0.100	0.035	B	0	SEE DRAWING	ID - 378A

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: inch

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		DIE ATTACH
	A	X	B	C	X	D	E	X	F											
14	0.260	x	0.174	0.320	x	0.221	U	0.681	x	0.295	0.025	0.030	0.030	0.085	0.100	0.035	B	0	-	ID - 6559A
14	0.260	x	0.174	0.320	x	0.221	U	0.700	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 134T
14	0.550	x	0.175	0.575	x	0.222	U	0.770	x	0.295	0.025	0.040	0.020	0.085	0.100	0.035	B	0	-	ID - 6273BA
14	0.550	x	0.175	0.575	x	0.222	U	0.770	x	0.295	0.035	0.025	0.040	0.100	0.100	0.035	B	0	0	ID - 6670A-MO
14	0.551	x	0.150	0.592	x	0.212	U	0.748	x	0.290	0.025	0.020	0.040	0.085	0.100	0.035	B	0	No.1,4,7,8,11,14	ID - 6154D
16	0.180	x	0.130	0.340	x	0.225	U	0.800	x	0.297	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 509ABL
16	0.180	x	0.147	0.300	x	0.223	U	0.800	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 140-MO
16	0.220	x	0.165	0.340	x	0.226	U	0.800	x	0.295	0.020	0.020	0.040	0.080	0.100	0.035	B	0	0	ID - 6139AAL
16	0.240	x	0.162	0.335	x	0.229	U	0.800	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	-	ID - 6763ABL
16	0.244	x	0.174	0.340	x	0.225	U	0.800	x	0.298	0.020	0.020	0.040	0.080	0.100	0.035	B	0	0	ID - 6319EAL
16	0.265	x	0.174	0.335	x	0.225	U	0.800	x	0.295	0.025	0.020	0.040	0.085	0.100	0.035	B	0	No.1	ID - 572BAL
16	0.320	x	0.174	0.375	x	0.220	U	0.800	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 201-MO
16	0.330	x	0.195	0.375	x	0.235	U	0.800	x	0.295	0.025	0.020	0.040	0.085	0.100	0.043	B	0	0	ID - 6732A
16	0.350	x	0.180	0.405	x	0.220	U	0.800	x	0.295	0.025	0.020	0.040	0.085	0.100	0.035	B	0	0	ID - 390GAL
16	0.400	x	0.175	0.460	x	0.225	U	0.800	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 6878AAL
16	0.400	x	0.221	0.510	x	0.221	U	0.800	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 494CAL
16	0.480	x	0.220	0.480	x	0.220	U	0.800	x	0.295	0.050	0.023		0.073	0.100	0.035	B	0	No.2-7, No.10-15, A PAD	ID - 497CBL
16	0.480	x	0.220	0.580	x	0.220	U	0.800	x	0.295	0.045	0.020	0.040	0.105	0.100	0.035	B	0	"G" PAD	ID - 6157-MO
18	0.210	x	0.130	0.315	x	0.225	U	0.900	x	0.295	0.020	0.015	0.045	0.080	0.100	0.035	B	0	0	ID - 510AB
18	0.220	x	0.174	0.315	x	0.226	U	0.900	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 245GC
18	0.235	x	0.174	0.335	x	0.225	U	0.900	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 402B
18	0.284	x	0.164	0.413	x	0.236	U	0.900	x	0.295	0.025	0.020	0.040	0.085	0.100	0.035	B	0	0	ID - 6809A-MO
18	0.320	x	0.175	0.380	x	0.225	U	0.900	x	0.295	0.035	0.035	0.030	0.100	0.100	0.035	B	0	0	ID - 6307D
20	0.225	x	0.168	0.315	x	0.217	U	1.000	x	0.296	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 251-MO

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: inch

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		DIE ATTACH
	A	X	B	C	X	D	E	X	F											
20	0.250	x	0.158	0.330	x	0.220	U	1.000	x	0.295	0.015	0.030	0.035	0.080	0.100	0.035	B	0	0	ID - 6755A
20	0.260	x	0.175	0.335	x	0.228	U	1.000	x	0.295	0.025	0.020	0.040	0.085	0.100	0.035	B	0	0	ID - 6268B
20	0.290	x	0.225	0.390	x	0.225	U	1.000	x	0.295	0.020	0.020	0.050	0.090	0.100	0.035	B	0	0	ID - 6808A-MO
20	0.350	x	0.250	0.720	x	0.315	U	1.000	x	0.394	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 6752A
20	0.355	x	0.217	0.445	x	0.225	U	1.000	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	0	ID - 6007B
20	0.400	x	0.206	0.495	x	0.206	U	1.000	x	0.295	0.020	0.020	0.040	0.080	0.100	0.035	B	0	GND PAD	ID - 6521A
20	0.426	x	0.180	0.492	x	0.226	U	1.000	x	0.295	0.020	0.025	0.040	0.085	0.100	0.035	B	0	GND PAD	ID - 6089C-MO
20	0.470	x	0.225	0.570	x	0.225	U	1.000	x	0.310	0.050	0.020	0.020	0.090	0.100	0.035	B	0	0	ID - 6902A
20	0.945	x	0.142	0.945	x	0.236	U	1.142	x	0.400	0.040	0.025	0.040	0.105	0.100	0.035	B	-	GND	ID - 7082-MO
20	1.300	x	0.160	1.300	x	0.260	U	1.500	x	0.394	0.020	0.020	0.040	0.080	0.100	0.035	B	-	No.11	ID - 6750A-MO
20	1.300	x	0.160	1.300	x	0.260	U	1.500	x	0.394	0.020	0.020	0.040	0.080	0.100	0.035	B	-	No.11	ID - 6751A-MO
22	0.630	x	0.122	0.866	x	0.319	U	1.252	x	0.394	0.030	0.030	0.040	0.120	0.100	0.038	B	-	No.1,12	ID - 6906A-MO
22	1.160	x	0.200	1.240	x	0.280	U	1.600	x	0.394	0.020	0.020	0.040	0.080	0.100	0.035	B	-	No.6	ID - 7126-MO
24	0.250	x	0.175	0.440	x	0.227	U	1.200	x	0.295	0.040	0.020	0.025	0.085	0.100	0.050	B	0	0	ID - 470K
24	0.250	x	0.250	0.400	x	0.400	U	1.200	x	0.594	0.040	0.025	0.020	0.085	0.100	0.050	B	-	0	ID - 137UAL
24	0.260	x	0.167	0.350	x	0.227	U	1.200	x	0.295	0.025	0.020	0.040	0.085	0.100	0.050	B	GND	GND	ID - 6332A-MO
24	0.269	x	0.220	0.500	x	0.220	U	1.200	x	0.295	0.020	0.020	0.045	0.085	0.100	0.050	B	0	"DB" PAD	ID - 6773A-MO
24	0.270	x	0.270	0.400	x	0.400	U	1.200	x	0.610	0.025	0.025	0.040	0.090	0.100	0.050	B	0	0	ID - 6853B
24	0.295	x	0.190	0.365	x	0.230	U	1.200	x	0.295	0.020	0.025	0.040	0.085	0.100	0.050	B	0	"A" PAD	ID - 6618-MO
24	0.310	x	0.310	0.400	x	0.400	U	1.200	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 167PAL
24	0.315	x	0.315	0.395	x	0.395	U	1.200	x	0.594	0.015	0.025	0.040	0.080	0.100	0.050	B	0	0	ID - 123QAL
24	0.320	x	0.174	0.375	x	0.220	U	0.900	x	0.295	0.020	0.020	0.040	0.080	0.070	0.050	B	0	0	ID - 6214C
24	0.380	x	0.380	0.460	x	0.460	U	1.200	x	0.594	0.025	0.048	0.040	0.113	0.100	0.050	B	0	0	ID - 6099AAL
24	0.400	x	0.400	0.460	x	0.460	U	1.200	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 690AAL

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: inch

LEAD COUNT	CAVITY							OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.			UP(U) DOWN(D)				1st	2nd	3rd	TOTAL	PITCH	STAND OFF HEIGHT		SEAL RING	DIE ATTACH		
	A	X	B	C	X	D		E	X	F											
24	0.472	x	0.354	0.551	x	0.433	U	1.200	x	0.595	0.020	0.020	0.040	0.080	0.100	0.050	B	0	No.12	ID - 563CA-MO	
24	0.496	x	0.157	0.543	x	0.208	U	1.669	x	0.295	0.020	0.030	0.035	0.085	0.100	0.050	B	-	No.19	ID - 7107-MO	
24	0.560	x	0.460	0.560	x	0.560	U	1.200	x	0.795	0.040	0.035	0.035	0.110	0.100	0.050	B	-	0	ID - 7106-MO	
24	0.600	x	0.225	0.720	x	0.225	U	1.200	x	0.295	0.015	0.025	0.060	0.100	0.100	0.050	B	0	0	ID - 6087B	
24	0.690	x	0.474	0.790	x	0.474	U	1.346	x	0.795	0.030	0.036	0.054	0.120	0.100	0.050	B	-	No.11, 14	ID - 7099B-MO	
24	0.713	x	0.513	0.810	x	0.610	U	1.360	x	0.795	0.030	0.035	0.055	0.120	0.100	0.070	B	-	No.12, 13, 14	ID - 7117A-MO	
24	0.819	x	0.157	0.870	x	0.208	U	1.669	x	0.295	0.020	0.030	0.035	0.085	0.100	0.050	B	-	No.19	ID - 7108-MO	
24	0.976	x	0.158	1.095	x	0.390	U	1.200	x	0.595	0.020	0.020	0.020	0.100	0.100	0.050	B	-	No.12, 13	ID - 7060AAL	
24	0.980	x	0.090	0.980	x	0.220	U	1.200	x	0.594	0.020	0.020	0.040	0.080	0.100	0.050	B	-	No.24	ID - 902-MO	
24	1.465	x	0.157	1.516	x	0.208	U	1.669	x	0.295	0.020	0.030	0.035	0.085	0.100	0.050	B	-	No.19	ID - 7109-MO	
28	0.220	x	0.220	0.370	x	0.370	U	1.400	x	0.594	0.020	0.020	0.040	0.080	0.100	0.050	B	0	0	ID - 620-MO	
28	0.223	x	0.175	0.300	x	0.225	U	1.400	x	0.295	0.020	0.020	0.040	0.080	0.100	0.050	B	0	0	ID - 6771A	
28	0.240	x	0.175	0.360	x	0.230	U	1.400	x	0.295	0.020	0.020	0.040	0.080	0.100	0.050	B	0	0	ID - 6244D	
28	0.250	x	0.250	0.370	x	0.370	U	1.400	x	0.594	0.020	0.020	0.040	0.080	0.100	0.050	B	0	0	ID - 247EAL	
28	0.260	x	0.167	0.350	x	0.227	U	1.400	x	0.295	0.020	0.020	0.040	0.080	0.100	0.050	B	0	0	ID - 6754A	
28	0.290	x	0.220	0.500	x	0.220	U	1.400	x	0.295	0.020	0.020	0.045	0.085	0.100	0.050	B	0	0	ID - 6770A	
28	0.300	x	0.300	0.400	x	0.400	U	1.400	x	0.595	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 6883V	
28	0.310	x	0.310	0.400	x	0.400	U	1.400	x	0.595	0.020	0.025	0.035	0.080	0.100	0.050	B	0	0	ID - 301XBL	
28	0.315	x	0.315	0.395	x	0.395	U	1.400	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 111MAL	
28	0.400	x	0.370	0.490	x	0.450	U	1.400	x	0.595	0.020	0.025	0.040	0.085	0.100	0.050	B	0	No.28	ID - 442CB-MO	
28	0.410	x	0.320	0.480	x	0.390	U	1.400	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 462L-MO	
28	0.410	x	0.390	0.490	x	0.390	U	1.400	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	PAD A,D	ID - 6716AAL	
28	0.440	x	0.220	0.560	x	0.230	U	1.400	x	0.295	0.018	0.030	0.037	0.085	0.100	0.050	B	0	-	ID - 6787B-MO	
28	0.457	x	0.382	0.598	x	0.461	U	1.400	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 405G-MO	



NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: inch



LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		DIE ATTACH
	A	X	B	C	X	D	E	X	F											
28	0.480	x	0.460	0.590	x	0.460	U	1.400	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	PAD A,D	ID - 6945B-MO
28	0.550	x	0.440	0.630	x	0.440	U	1.400	x	0.594	0.040	0.040	0.040	0.120	0.100	0.050	B	0	0	ID - 6881AAL
28	0.560	x	0.279	0.610	x	0.325	U	1.400	x	0.395	0.020	0.020	0.040	0.080	0.100	0.050	B	0	GND PAD	ID - 6543AA
28	0.600	x	0.225	0.720	x	0.225	U	1.400	x	0.295	0.015	0.040	0.045	0.100	0.100	0.050	B	0	-	ID - 6777B-MO
28	1.160	x	0.110	1.175	x	0.180	U	1.450	x	0.595	0.020	0.020	0.040	0.080	0.100	0.050	B	-	No.28	ID - 903C-MO
32	0.260	x	0.170	0.335	x	0.223	U	1.600	x	0.295	0.015	0.025	0.060	0.100	0.100	0.050	B	0	0	ID - 6395A
32	0.280	x	0.240	0.720	x	0.330	U	1.600	x	0.395	0.020	0.025	0.040	0.085	0.100	0.050	B	No.16	No.16	ID - 6912A-MO
32	0.300	x	0.300	0.400	x	0.400	U	1.600	x	0.594	0.025	0.025	0.040	0.090	0.100	0.050	B	0	-	ID - 6823A-MO
32	0.310	x	0.240	0.400	x	0.400	U	1.600	x	0.595	0.025	0.020	0.040	0.085	0.100	0.050	B	0	PAD D/A	ID - 6799A-MO
32	0.380	x	0.240	0.720	x	0.330	U	1.600	x	0.394	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 6733A
32	0.394	x	0.299	0.598	x	0.461	U	1.600	x	0.594	0.015	0.025	0.040	0.080	0.100	0.050	B	0	0	ID - 6901A-MO
32	0.394	x	0.354	0.598	x	0.461	U	1.600	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 6929B-MO
32	0.410	x	0.490	0.555	x	0.490	U	1.600	x	0.595	0.020	0.030	0.040	0.090	0.100	0.050	B	0	No.16	ID - 6857B-MO
32	0.535	x	0.430	0.595	x	0.490	U	1.600	x	0.594	0.020	0.020	0.040	0.080	0.100	0.050	B	0	No.14	ID - 6646B
32	0.550	x	0.370	0.786	x	0.456	U	1.600	x	0.595	0.025	0.020	0.040	0.085	0.100	0.050	B	0	0	ID - 6657B-MO
32	0.600	x	0.354	0.679	x	0.433	U	1.600	x	0.594	0.025	0.020	0.040	0.085	0.100	0.050	B	0	0	ID - 6954A-MO
32	0.606	x	0.455	0.686	x	0.455	U	1.300	x	0.790	0.025	0.020	0.045	0.090	0.070	0.050	B	-	No.22 & 27	ID - 7120A-MO
32	0.636	x	0.189	1.160	x	0.379	U	1.250	x	0.490	0.020	0.020	0.035	0.110	0.070	0.050	B	-	No.26	ID - 7086-MO
32	0.678	x	0.414	0.758	x	0.414	U	1.300	x	0.790	0.025	0.020	0.045	0.090	0.070	0.050	B	-	No.22 & 27	ID - 7111A-MO
32	0.773	x	0.354	0.773	x	0.414	U	1.600	x	0.595	0.020	0.020	0.060	0.100	0.100	0.050	B	0	0	ID - 6708B-MO
40	0.250	x	0.250	0.370	x	0.370	U	2.000	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 512ZBL
40	0.300	x	0.380	0.470	x	0.470	U	2.000	x	0.594	0.015	0.035	0.035	0.085	0.100	0.050	B	0	-	ID - 6785B-MO
40	0.310	x	0.310	0.400	x	0.400	U	2.000	x	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 6077RAL
40	0.340	x	0.340	0.400	x	0.400	U	2.000	x	0.594	0.020	0.020	0.040	0.080	0.100	0.050	B	0	0	ID - 637BAL

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: inch

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		
	A	X	B	C	X	D	E	X	F											
40	0.400	×	0.400	0.470	×	0.470	U	2.000	×	0.594	0.025	0.025	0.040	0.090	0.100	0.050	B	0	0	ID - 6807CAL
40	0.400	×	0.400	0.470	×	0.470	U	2.000	×	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 192YBL
40	0.420	×	0.420	0.480	×	0.480	U	2.000	×	0.594	0.015	0.030	0.040	0.085	0.100	0.050	B	0	0	ID - 6871A-MO
40	1.266	×	0.269	1.586	×	0.504	U	2.000	×	0.795	0.020	0.040	0.040	0.130	0.100	0.050	B	-	No.33	ID - 7091-MO
48	0.200	×	0.200	0.340	×	0.340	U	2.400	×	0.595	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 6505A-MO
48	0.250	×	0.250	0.350	×	0.350	U	2.400	×	0.595	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 6909B-MO
48	0.310	×	0.310	0.400	×	0.400	U	2.400	×	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 343QAL
48	0.350	×	0.350	0.450	×	0.450	U	2.400	×	0.594	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 6109BAL
52	0.551	×	0.354	0.630	×	0.433	U	1.840	×	0.590	0.020	0.020	0.040	0.080	0.070	0.050	B	0	0	ID - 6550A
64	0.310	×	0.310	0.400	×	0.400	U	3.200	×	0.894	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 372AB
64	0.417	×	0.417	0.525	×	0.525	U	2.240	×	0.738	0.020	0.025	0.045	0.090	0.070	0.050	B	0	0	ID - 6515Z
64	0.480	×	0.480	0.550	×	0.550	U	3.200	×	0.894	0.020	0.025	0.040	0.085	0.100	0.050	B	0	0	ID - 297J
64	0.866	×	0.413	0.929	×	0.476	U	2.260	×	0.745	0.022	0.030	0.043	0.095	0.070	0.050	B	-	-	ID - 6894A-MO
64	1.181	×	0.394	1.299	×	0.512	U	3.200	×	0.894	0.020	0.025	0.040	0.085	0.100	0.050	B	-	0	ID - 6780A

NTK C-DIP (Ceramic - Dual Inline Packages)

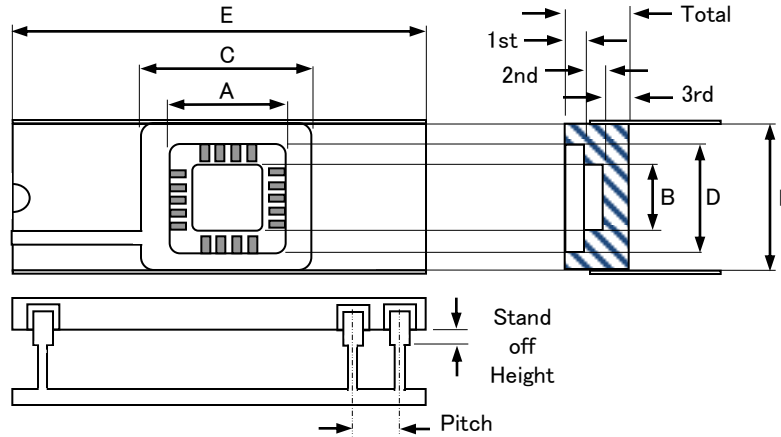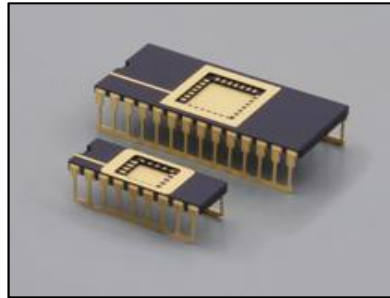

UNIT: mm

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.		TOP CAV.		UP(U) DOWN(D)	1st				2nd	3rd	TOTAL	PITCH	STAND OFF HEIGHT	SEAL RING		DIE ATTACH			
	A	X	B	C			X	D	E							X		F		
8	5.080	x	4.318	7.112	x	5.588	U	9.906	x	7.366	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 6891-MO
8	5.540	x	4.572	7.490	x	5.720	U	9.652	x	7.371	1.016	1.016	1.730	3.762	2.540	1.016	B	0	-	ID - 6656C-MO
8	5.540	x	4.572	7.869	x	4.572	U	9.911	x	7.490	1.321	1.016		2.337	2.540	1.001	B	0	SEE DRAWING	ID - 6538F-MO
8	5.537	x	4.572	8.128	x	5.715	U	9.906	x	7.493	0.635	0.762	0.635	2.032	2.540	1.016	B	0	0	ID - 6074R
8	5.588	x	4.420	8.001	x	5.740	U	13.208	x	7.366	0.508	0.635	1.016	2.159	2.540	1.001	B	0	0	ID - 6177G
8	6.756	x	4.496	9.525	x	5.563	U	13.208	x	7.366	0.635	0.635	1.016	2.286	2.540	0.889	B	0	No.1,5	ID - 6911A-MO
8	7.747	x	2.413	10.160	x	5.080	U	13.208	x	7.315	0.508	0.508	1.016	2.032	2.540	0.889	B	0	No.1,4,5,8	ID - 6393A
10	5.461	x	2.286	6.350	x	4.064	U	12.700	x	7.493	0.508	0.508	1.016	2.032	3.302	0.889	B	No.10	No.10	ID - 7003C
14	5.080	x	3.909	8.001	x	5.611	U	18.999	x	7.501	0.635	0.762	0.762	2.159	2.540	0.889	B	0	0	ID - 6764A-MO
14	5.588	x	3.810	8.001	x	5.613	U	18.999	x	7.493	0.381	0.762	0.889	2.032	2.540	0.889	B	-	-	ID - 6144C
14	5.588	x	4.420	8.001	x	5.720	U	18.999	x	7.501	0.508	0.635	0.889	2.032	2.540	0.889	B	0	0	ID - 268NA
14	6.198	x	4.420	8.636	x	5.720	U	20.320	x	7.531	0.508	0.635	1.016	2.159	2.540	0.889	B	0	SEE DRAWING	ID - 378A

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: mm

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		DIE ATTACH
	A	X	B	C	X	D	E	X	F											
14	6.599	x	4.420	8.128	x	5.611	U	17.300	x	7.501	0.635	0.762	0.762	2.159	2.540	0.889	B	0	-	ID - 6559A
14	6.604	x	4.420	8.128	x	5.613	U	17.780	x	7.493	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 134T
14	13.970	x	4.445	14.605	x	5.639	U	19.558	x	7.493	0.635	1.016	0.508	2.159	2.540	0.889	B	0	-	ID - 6273BA
14	13.970	x	4.445	14.605	x	5.639	U	19.558	x	7.493	0.889	0.635	1.016	2.540	2.540	0.889	B	0	0	ID - 6670A-MO
14	13.995	x	3.810	15.037	x	5.385	U	18.999	x	7.366	0.635	0.508	1.016	2.159	2.540	0.889	B	0	No.1,4,7,8,11,14	ID - 6154D
16	4.569	x	3.299	8.641	x	5.720	U	20.320	x	7.531	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 509ABL
16	4.572	x	3.734	7.620	x	5.664	U	20.320	x	7.493	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 140-MO
16	5.588	x	4.191	8.641	x	5.740	U	20.320	x	7.501	0.508	0.508	1.016	2.032	2.540	0.889	B	0	0	ID - 6139AAL
16	6.101	x	4.110	8.509	x	5.819	U	20.320	x	7.501	0.508	0.635	1.016	2.159	2.540	0.889	B	0	-	ID - 6763ABL
16	6.198	x	4.420	8.636	x	5.715	U	20.320	x	7.569	0.508	0.508	1.016	2.032	2.540	0.889	B	0	0	ID - 6319EAL
16	6.731	x	4.420	8.509	x	5.715	U	20.320	x	7.493	0.635	0.508	1.016	2.159	2.540	0.889	B	0	No.1	ID - 572BAL
16	8.128	x	4.420	9.525	x	5.588	U	20.320	x	7.493	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 201-MO
16	8.382	x	4.953	9.525	x	5.969	U	20.320	x	7.493	0.635	0.508	1.016	2.159	2.540	1.092	B	0	0	ID - 6732A
16	8.890	x	4.572	10.287	x	5.588	U	20.320	x	7.493	0.635	0.508	1.016	2.159	2.540	0.889	B	0	0	ID - 390GAL
16	10.160	x	4.445	11.684	x	5.715	U	20.320	x	7.493	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 6878AAL
16	10.160	x	5.613	12.954	x	5.613	U	20.320	x	7.493	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 494CAL
16	12.192	x	5.588	12.189	x	5.588	U	20.320	x	7.493	1.270	0.582		1.852	2.540	0.889	B	0	No.2-7, No.10-15, A PAD	ID - 497CBL
16	12.192	x	5.588	14.732	x	5.588	U	20.320	x	7.493	1.143	0.508	1.016	2.667	2.540	0.889	B	0	"G" PAD	ID - 6157-MO
18	5.329	x	3.302	8.001	x	5.720	U	22.860	x	7.501	0.508	0.381	1.143	2.032	2.540	0.889	B	0	0	ID - 510AB
18	5.588	x	4.420	8.001	x	5.740	U	22.860	x	7.493	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 245GC
18	5.969	x	4.420	8.509	x	5.720	U	22.860	x	7.501	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 402B
18	7.214	x	4.166	10.490	x	5.994	U	22.860	x	7.493	0.635	0.508	1.016	2.159	2.540	0.889	B	0	0	ID - 6809A-MO
18	8.128	x	4.445	9.652	x	5.715	U	22.860	x	7.493	0.889	0.889	0.762	2.540	2.540	0.889	B	0	0	ID - 6307D
20	5.715	x	4.267	8.001	x	5.512	U	25.400	x	7.518	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 251-MO

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: mm

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		DIE ATTACH
	A	X	B	C	X	D	E	X	F											
20	6.350	x	4.013	8.382	x	5.588	U	25.400	x	7.493	0.381	0.762	0.889	2.032	2.540	0.889	B	0	0	ID - 6755A
20	6.604	x	4.445	8.509	x	5.791	U	25.400	x	7.493	0.635	0.508	1.016	2.159	2.540	0.889	B	0	0	ID - 6268B
20	7.366	x	5.715	9.906	x	5.715	U	25.400	x	7.493	0.508	0.508	1.270	2.286	2.540	0.889	B	0	0	ID - 6808A-MO
20	8.890	x	6.350	18.288	x	8.001	U	25.400	x	10.008	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 6752A
20	9.020	x	5.509	11.300	x	5.720	U	25.400	x	7.501	0.508	0.635	1.016	2.159	2.540	0.889	B	0	0	ID - 6007B
20	10.160	x	5.230	12.570	x	5.230	U	25.400	x	7.501	0.508	0.508	1.016	2.032	2.540	0.889	B	0	GND PAD	ID - 6521A
20	10.820	x	4.572	12.499	x	5.740	U	25.400	x	7.501	0.508	0.635	1.016	2.159	2.540	0.889	B	0	GND PAD	ID - 6089C-MO
20	11.938	x	5.715	14.478	x	5.715	U	25.400	x	7.874	1.270	0.508	0.508	2.286	2.540	0.889	B	0	0	ID - 6902A
20	24.003	x	3.607	24.003	x	5.994	U	29.007	x	10.160	1.016	0.635	1.016	2.667	2.540	0.889	B	-	GND	ID - 7082-MO
20	33.020	x	4.064	33.020	x	6.604	U	38.100	x	10.008	0.508	0.508	1.016	2.032	2.540	0.889	B	-	No.11	ID - 6750A-MO
20	33.020	x	4.064	33.020	x	6.604	U	38.100	x	10.008	0.508	0.508	1.016	2.032	2.540	0.889	B	-	No.11	ID - 6751A-MO
22	16.002	x	3.099	21.996	x	8.103	U	31.801	x	10.008	0.762	0.762	1.016	3.048	2.540	0.965	B	-	No.1,12	ID - 6906A-MO
22	29.464	x	5.080	31.496	x	7.112	U	40.640	x	10.008	0.508	0.508	1.016	2.032	2.540	0.889	B	-	No.6	ID - 7126-MO
24	6.350	x	4.445	11.176	x	5.766	U	30.480	x	7.493	1.016	0.508	0.635	2.159	2.540	1.270	B	0	0	ID - 470K
24	6.350	x	6.350	10.160	x	10.160	U	30.480	x	15.088	1.016	0.635	0.508	2.159	2.540	1.270	B	-	0	ID - 137UAL
24	6.604	x	4.242	8.890	x	5.766	U	30.480	x	7.493	0.635	0.508	1.016	2.159	2.540	1.270	B	GND	GND	ID - 6332A-MO
24	6.833	x	5.588	12.700	x	5.588	U	30.480	x	7.493	0.508	0.508	1.143	2.159	2.540	1.270	B	0	"DB"PAD	ID - 6773A-MO
24	6.858	x	6.858	10.160	x	10.160	U	30.480	x	15.494	0.635	0.635	1.016	2.286	2.540	1.270	B	0	0	ID - 6853B
24	7.493	x	4.826	9.271	x	5.842	U	30.480	x	7.493	0.508	0.635	1.016	2.159	2.540	1.270	B	0	"A"PAD	ID - 6618-MO
24	7.874	x	7.874	10.160	x	10.160	U	30.480	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 167PAL
24	8.001	x	8.001	10.033	x	10.033	U	30.480	x	15.088	0.381	0.635	1.016	2.032	2.540	1.270	B	0	0	ID - 123QAL
24	8.128	x	4.420	9.530	x	5.588	U	22.860	x	7.501	0.508	0.508	1.016	2.032	1.778	1.270	B	0	0	ID - 6214C
24	9.652	x	9.652	11.684	x	11.684	U	30.480	x	15.088	0.635	1.219	1.016	2.870	2.540	1.270	B	0	0	ID - 6099AAL
24	10.160	x	10.160	11.684	x	11.684	U	30.480	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 690AAL

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: mm

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		DIE ATTACH
	A	X	B	C	X	D	E	X	F											
24	11.999	x	8.999	14.000	x	10.998	U	30.480	x	15.100	0.508	0.508	1.016	2.032	2.540	1.270	B	0	No.12	ID - 563CA-MO
24	12.598	x	3.988	13.792	x	5.283	U	42.393	x	7.493	0.508	0.762	0.889	2.159	2.540	1.270	B	-	No.19	ID - 7107-MO
24	14.224	x	11.684	14.224	x	14.224	U	30.480	x	20.193	1.016	0.889	0.889	2.794	2.540	1.270	B	-	0	ID - 7106-MO
24	15.240	x	5.715	18.288	x	5.715	U	30.480	x	7.493	0.381	0.635	1.524	2.540	2.540	1.270	B	0	0	ID - 6087B
24	17.531	x	12.040	20.071	x	12.040	U	34.188	x	20.190	0.762	0.909	1.369	3.040	2.540	1.270	B	-	No.11, 14	ID - 7099B-MO
24	18.110	x	13.030	20.569	x	15.489	U	34.544	x	20.190	0.762	0.889	1.400	3.051	2.540	1.778	B	-	No.12, 13, 14	ID - 7117A-MO
24	20.803	x	3.988	22.098	x	5.283	U	42.393	x	7.493	0.508	0.762	0.889	2.159	2.540	1.270	B	-	No.19	ID - 7108-MO
24	24.801	x	4.001	27.810	x	9.911	U	30.480	x	15.100	0.508	0.508	0.508	1.524	2.540	1.270	B	-	No.12, 13	ID - 7060AAL
24	24.892	x	2.286	24.892	x	5.588	U	30.480	x	15.088	0.508	0.508	1.016	2.032	2.540	1.270	B	-	No.24	ID - 902-MO
24	37.211	x	3.988	38.506	x	5.283	U	42.393	x	7.493	0.508	0.762	0.889	2.159	2.540	1.270	B	-	No.19	ID - 7109-MO
28	5.588	x	5.588	9.398	x	9.398	U	35.560	x	15.088	0.508	0.508	1.016	2.032	2.540	1.270	B	0	0	ID - 620-MO
28	5.664	x	4.445	7.620	x	5.715	U	35.560	x	7.493	0.508	0.508	1.016	2.032	2.540	1.270	B	0	0	ID - 6771A
28	6.096	x	4.445	9.144	x	5.842	U	35.560	x	7.493	0.508	0.508	1.016	2.032	2.540	1.270	B	0	0	ID - 6244D
28	6.350	x	6.350	9.398	x	9.398	U	35.560	x	15.088	0.508	0.508	1.016	2.032	2.540	1.270	B	0	0	ID - 247EAL
28	6.604	x	4.242	8.890	x	5.766	U	35.560	x	7.493	0.508	0.508	1.016	2.032	2.540	1.270	B	0	0	ID - 6754A
28	7.366	x	5.588	12.700	x	5.588	U	35.560	x	7.493	0.508	0.508	1.143	2.159	2.540	1.270	B	0	0	ID - 6770A
28	7.620	x	7.620	10.160	x	10.160	U	35.560	x	15.100	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 6883V
28	7.869	x	7.869	10.160	x	10.160	U	35.560	x	15.100	0.508	0.635	0.889	2.032	2.540	1.270	B	0	0	ID - 301XBL
28	8.001	x	8.001	10.033	x	10.033	U	35.560	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 111MAL
28	10.160	x	9.398	12.451	x	11.430	U	35.560	x	15.100	0.508	0.635	1.016	2.159	2.540	1.270	B	0	No.28	ID - 442CB-MO
28	10.414	x	8.128	12.192	x	9.906	U	35.560	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 462L-MO
28	10.414	x	9.906	12.446	x	9.906	U	35.560	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	PAD A,D	ID - 6716AAL
28	11.176	x	5.588	14.224	x	5.842	U	35.560	x	7.493	0.457	0.762	0.940	2.159	2.540	1.270	B	0	-	ID - 6787B-MO
28	11.600	x	9.700	15.199	x	11.699	U	35.560	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 405G-MO

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: mm

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		DIE ATTACH
	A	X	B	C	X	D	E	X	F											
28	12.192	x	11.684	14.986	x	11.684	U	35.560	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	PAD A,D	ID - 6945B-MO
28	13.970	x	11.176	16.002	x	11.176	U	35.560	x	15.088	1.016	1.016	1.016	3.048	2.540	1.270	B	0	0	ID - 6881AAL
28	14.219	x	7.079	15.489	x	8.260	U	35.560	x	10.030	0.508	0.508	1.016	2.032	2.540	1.270	B	0	GND PAD	ID - 6543AA
28	15.240	x	5.715	18.288	x	5.715	U	35.560	x	7.493	0.381	1.016	1.143	2.540	2.540	1.270	B	0	-	ID - 6777B-MO
28	29.459	x	2.789	29.850	x	4.572	U	36.830	x	15.100	0.508	0.508	1.016	2.032	2.540	1.270	B	-	No.28	ID - 903C-MO
32	6.599	x	4.318	8.509	x	5.659	U	40.640	x	7.501	0.381	0.635	1.524	2.540	2.540	1.270	B	0	0	ID - 6395A
32	7.112	x	6.096	18.288	x	8.382	U	40.640	x	10.033	0.508	0.635	1.016	2.159	2.540	1.270	B	No.16	No.16	ID - 6912A-MO
32	7.620	x	7.620	10.160	x	10.160	U	40.640	x	15.088	0.635	0.635	1.016	2.286	2.540	1.270	B	0	-	ID - 6823A-MO
32	7.874	x	6.096	10.160	x	10.160	U	40.640	x	15.113	0.635	0.508	1.016	2.159	2.540	1.270	B	0	PAD D/A	ID - 6799A-MO
32	9.652	x	6.096	18.288	x	8.382	U	40.640	x	10.008	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 6733A
32	10.008	x	7.595	15.189	x	11.709	U	40.640	x	15.088	0.381	0.635	1.016	2.032	2.540	1.270	B	0	0	ID - 6901A-MO
32	10.008	x	8.992	15.189	x	11.709	U	40.640	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 6929B-MO
32	10.414	x	12.446	14.097	x	12.446	U	40.640	x	15.113	0.508	0.762	1.016	2.286	2.540	1.270	B	0	No.16	ID - 6857B-MO
32	13.589	x	10.922	15.113	x	12.446	U	40.640	x	15.088	0.508	0.508	1.016	2.032	2.540	1.270	B	0	No.14	ID - 6646B
32	13.970	x	9.398	19.964	x	11.582	U	40.640	x	15.113	0.635	0.508	1.016	2.159	2.540	1.270	B	0	0	ID - 6657B-MO
32	15.240	x	8.992	17.247	x	10.991	U	40.640	x	15.088	0.635	0.508	1.016	2.159	2.540	1.270	B	0	0	ID - 6954A-MO
32	15.392	x	11.557	17.424	x	11.557	U	33.020	x	20.066	0.635	0.508	1.143	2.286	1.778	1.270	B	-	No.22 & 27	ID - 7120A-MO
32	16.154	x	4.801	29.464	x	9.627	U	31.750	x	12.446	0.508	0.508	0.889	2.794	1.778	1.270	B	-	No.26	ID - 7086-MO
32	17.221	x	10.516	19.253	x	10.516	U	33.020	x	20.066	0.635	0.508	1.143	2.286	1.778	1.270	B	-	No.22 & 27	ID - 7111A-MO
32	19.634	x	8.992	19.634	x	10.516	U	40.640	x	15.113	0.508	0.508	1.524	2.540	2.540	1.270	B	0	0	ID - 6708B-MO
40	6.350	x	6.350	9.398	x	9.398	U	50.800	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 512ZBL
40	7.620	x	9.652	11.938	x	11.938	U	50.800	x	15.088	0.381	0.889	0.889	2.159	2.540	1.270	B	0	-	ID - 6785B-MO
40	7.874	x	7.874	10.160	x	10.160	U	50.800	x	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 6077RAL
40	8.636	x	8.636	10.160	x	10.160	U	50.800	x	15.088	0.508	0.508	1.016	2.032	2.540	1.270	B	0	0	ID - 637BAL

NTK C-DIP (Ceramic – Dual Inline Packages)

UNIT: mm

LEAD COUNT	CAVITY						OVERALL			LAYER THICKNESS				LEAD		NTK MATERIAL CODE B:Black W:White	CONNECTION (0:NON-Connect)		DRAWING NO.	
	DIE CAV.			TOP CAV.						UP(U) DOWN(D)	1st	2nd	3rd	TOTAL	PITCH		STAND OFF HEIGHT	SEAL RING		
	A	X	B	C	X	D	E	X	F											
40	10.160	×	10.160	11.938	×	11.938	U	50.800	×	15.088	0.635	0.635	1.016	2.286	2.540	1.270	B	0	0	ID - 6807CAL
40	10.160	×	10.160	11.938	×	11.938	U	50.800	×	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 192YBL
40	10.668	×	10.668	12.192	×	12.192	U	50.800	×	15.088	0.381	0.762	1.016	2.159	2.540	1.270	B	0	0	ID - 6871A-MO
40	32.156	×	6.833	40.284	×	12.802	U	50.800	×	20.193	0.508	1.016	1.016	3.302	2.540	1.270	B	-	No.33	ID - 7091-MO
48	5.080	×	5.080	8.641	×	8.641	U	60.960	×	15.100	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 6505A-MO
48	6.350	×	6.350	8.890	×	8.890	U	60.960	×	15.113	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 6909B-MO
48	7.874	×	7.874	10.160	×	10.160	U	60.960	×	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 343QAL
48	8.890	×	8.890	11.430	×	11.430	U	60.960	×	15.088	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 6109BAL
52	13.995	×	8.992	16.002	×	10.998	U	46.736	×	14.986	0.508	0.508	1.016	2.032	1.778	1.270	B	0	0	ID - 6550A
64	7.869	×	7.869	10.160	×	10.160	U	81.280	×	22.708	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 372AB
64	10.599	×	10.599	13.340	×	13.340	U	56.901	×	18.750	0.508	0.635	1.151	2.294	1.778	1.270	B	0	0	ID - 6515Z
64	12.192	×	12.192	13.970	×	13.970	U	81.280	×	22.710	0.508	0.635	1.016	2.159	2.540	1.270	B	0	0	ID - 297J
64	21.996	×	10.490	23.597	×	12.090	U	57.404	×	18.923	0.559	0.762	1.092	2.413	1.778	1.270	B	-	-	ID - 6894A-MO
64	30.000	×	10.000	33.000	×	13.000	U	81.280	×	22.710	0.508	0.635	1.016	2.159	2.540	1.270	B	-	0	ID - 6780A